



COMBiLiFT

Customised Handling Solutions

COMBi[®]-CB

Compact multi-directional forklift



Long Load Handling



Inside Container



Bottom Level Storage



Sliding LP Gas Bottle



> Handles Palletised & Long Loads
> Operates Indoors & Outdoors

www.COMBiLiFT.com




SPECIFICATIONS



COMBi[®]-CB

Protected by Design Registration Copyright: *European Community No.: 000725668-0001 | US No.: D579, 624 | Canadian No.: 123292 | Australian No.: 318370 | Russian Federation No.: 70814 | Korean No.: 30-0516087 | Japanese No.: 1330896 | Taiwan No.: D126056 | Chinese No.: ZL200730329732.6*


DESCRIPTION		STD	OPTIONAL		
1a	Standard Lift Height	4000mm	4900mm	5500mm	6000mm
1b	Free Lift Height	0	1318mm	1518mm	1718mm
2	Height Mast Closed	2670mm	2243mm	2443mm	2643mm
3	Max. (Mast Raised)	4830mm	5778mm	6378mm	6878mm
4	Overall Length	2615mm			
5	Ground Clearance Under Mast	125mm			
6	Ground Clearance to Wheelbase Centre	100mm			
7	Height of Overhead Guard	2250mm			
8	Width	1500mm			
9	Outside Spread of Fork Arms	1325mm			
10	Track Front	1320mm			
11	Load Centre Distance	600mm			
12	Overhang Front	300mm			
13	Wheel Base	1100mm			
14	Overhang Back	140mm			
15	Length From Face of Fork	1550mm			
16	Approach Angle	30°			
17	Ramp Angle	15°			
18	Departure Angle	30°			
19	Forward Tilt	3°			
20	Backward Tilt	8°			
21	Minimum Outside Radius	1500mm			
A	Capacity	2500Kg			
B	Unladen Weight	5900Kg			
C	Maximum Ground Speed	12 Km/h			
D	Gradability	10%			
E	V1505 Kubota diesel / 3.0L GM LP Gas	32KW / 48KW			
F	Electrics	12 Volt			
G	Fork Section	125 x 50 x 1065mm			
H	16 x 7 - 10.5 Front Rubber Tyre x 2	OD 406 / Width 178			
I	22 x 10 x 16 Rear Rubber Tyre x 1	OD 559 / Width 254			
J	Standard Colour	Green and Grey			
K	Suspension Seat	KAB Model 211			

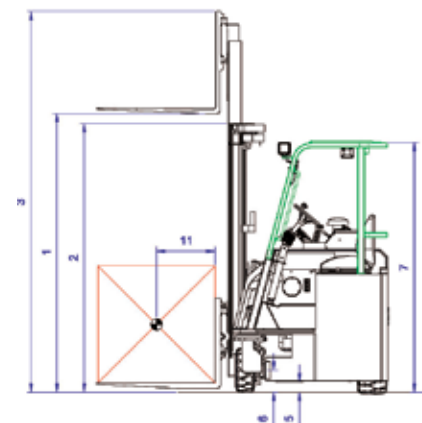

SIDEWARD MODE

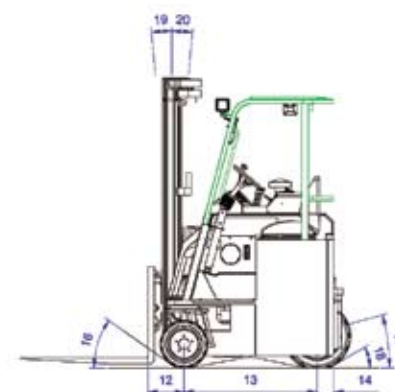

FRONTAL MODE

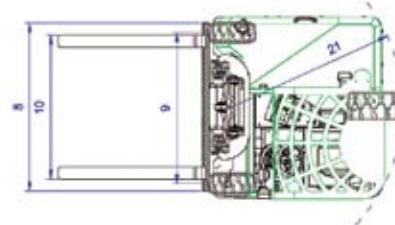

FEATURES INCLUDE:

- Open Cabin
- Load Sensing Steering
- 4-way lever positioning of Wheels
- Multi-direction Operation
- 3 Wheel Hydrostatic Drive
- 200mm Side Shift
- Automatic Carousel

Distributed by

www.COMBiLiFT.com

COMBiLiFT

Co. Monaghan
Ireland

T: +353 47 80500

F: +353 47 80501

E: info@combilift.com